

Ordering Code

Model No. T6CC\* W - B22 - B08 - 1 R 00 - D 1 - 00

Series M = Mobile 1 shaft seal  
Series P = Mobile 2 shaft seals

Use for severe duty shaft only\*

Cam ring for "P1" & "P2"

(Delivery at 0 bar & 1500 r.p.m.)

B03 = 16,2 l/min	B17 = 87,4 l/min
B05 = 25,8 l/min	B20 = 95,7 l/min
B06 = 31,9 l/min	B22 = 105,4 l/min
B08 = 39,6 l/min	B25 = 118,9 l/min
B10 = 51,1 l/min	B28 = 133,2 l/min
B12 = 55,6 l/min	B31 = 150,0 l/min
B14 = 69,0 l/min	

Type of shaft

Type of shaft

M version

MW severe duty

- 1 = keyed (no SAE)
- 3 = splined (SAE BB)
- 5 = splined (SAE B)

- \*2 = keyed (SAE BB)
- \*R = keyed special
- \*X = keyed special

P version

- 3 = splined (no SAE)
- 4 = splined (SAE BB)
- 6 = splined (no SAE)

- \*W = keyed special
- \*V = keyed special
- \*T = splined (SAE J718c)

Modification

Mounting W/connection variables

P2	P1 = 1" - S = 3"		P1 = 1" - S = 2.1/2" <sup>(2)</sup>	
	1"	3/4" <sup>(1)</sup>	1"	3/4" <sup>(1)</sup>
Code	00	01	10	11

<sup>1)</sup> for 46 ml/rev. max.

<sup>2)</sup> for 126 ml/rev. max.

The largest cartridge must be always mounted in the front.

Seal Class

- 1 = S1 (for mineral oil)
- 4 = S4 (for the resistant fluids)
- 5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 34)


00 = standard

Direct. of rotation (view on shaft end)

R = clockwise


L = counter-clockwise

INTERNAL LEAKAGE (TYPICAL)

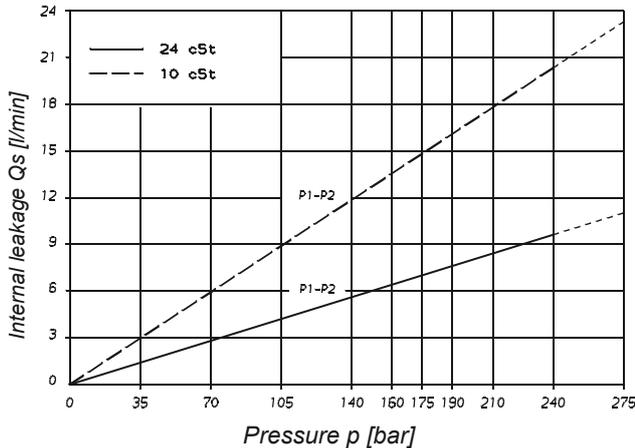


Do not operate the pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL)  
T6CCM - B22 - B22

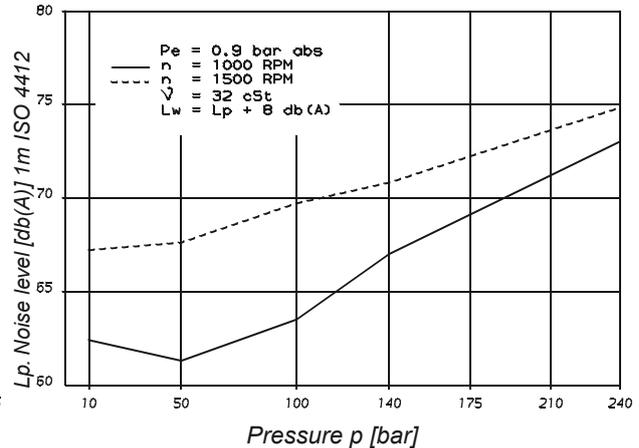


Double pump noise level is given with each section discharging at the pressure noted on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

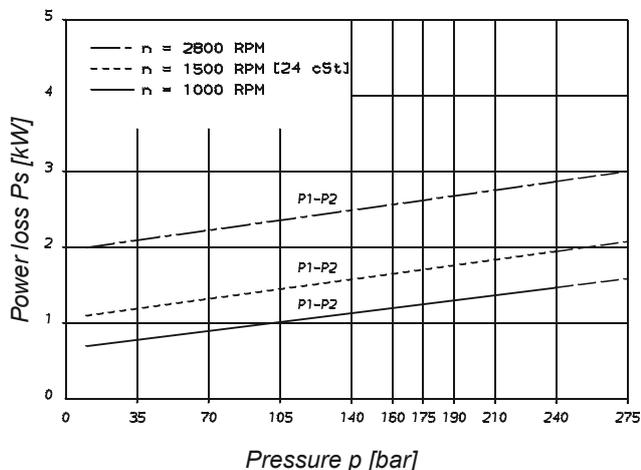


Total hydrodynamic power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

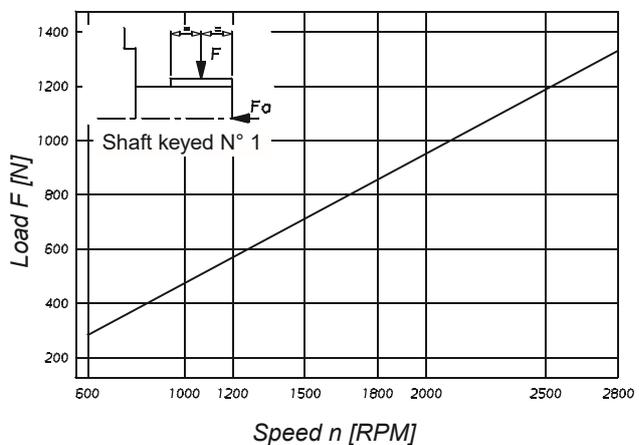

Maximum permissible axial load Fa = 800 N

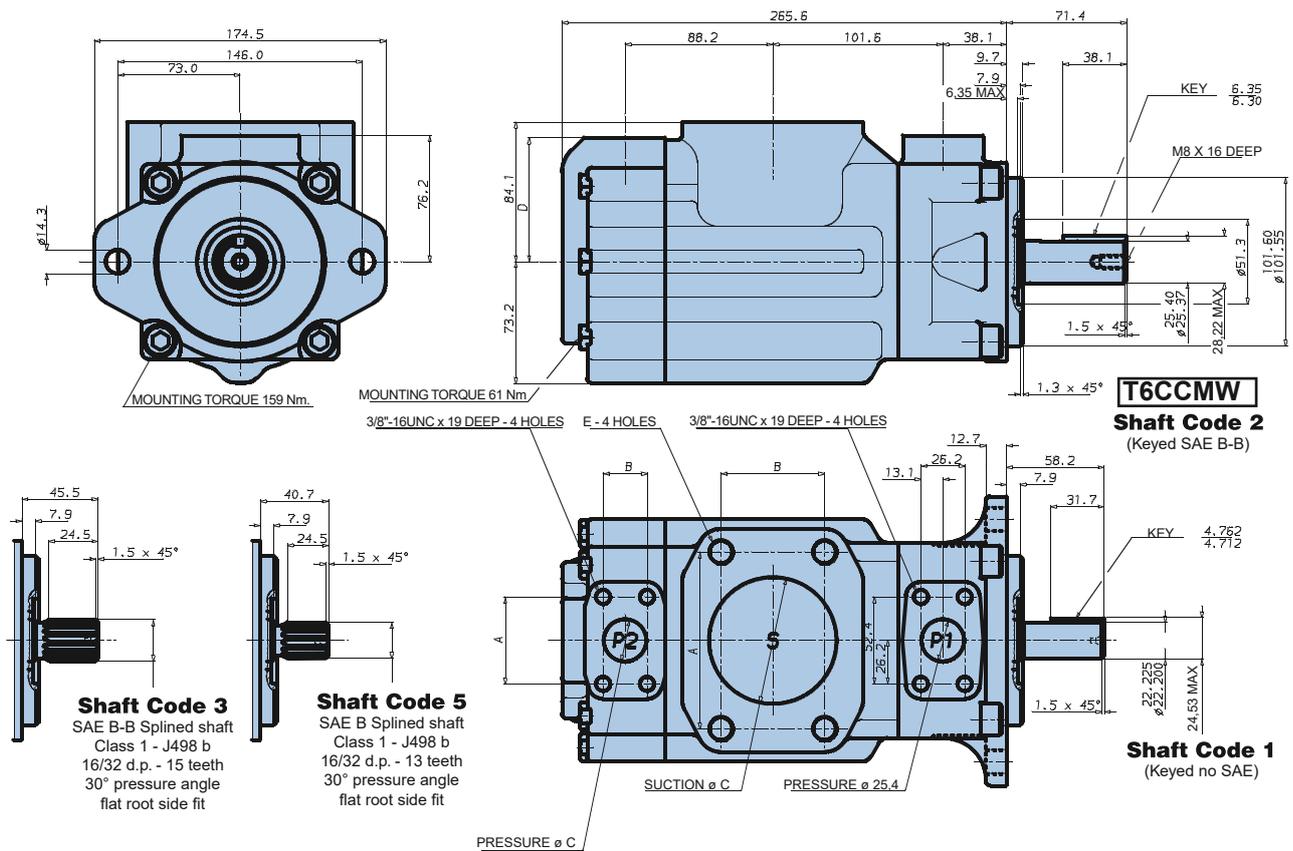

Additional special shafts: see page 33  
 Additional T6CCMW shaft code T: see page 33  
 Additional T6CCP version shaft see page 33

Port	Code	A	B	C	D	E
S	3"	106,4	61,9	76,2		5/8"-11 x 28.4 deep
S	2"1/2	88,9	50,8	63,5		1/2"-13 x 23.9 deep
P1	1"	52,4	26,2	25,4	76,2	
P2	3/4"	47,7	22,2	19,0	76,2	
P2	1"	52,4	26,2	25,4	74,7	

Shaft torque limits [ml/rev x bar]		
Pump	Shaft	Vi x p max. P1 + P2
T6CCM	1	14300
T6CCMW	2	21420
T6CCM	3	32670
T6CCM	5	20600

**OPERATING CHARACTERISTICS - TYPICAL [24 cSt]**

Pressure port	Series	Volumetric Displacement Vi	Flow Q [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1 & P2	B03	10,8 ml/rev	16,2	10,7	-	1,3	5,3	-
	B05	17,2 ml/rev	25,8	20,3	15,8	1,4	7,5	12,2
	B06	21,3 ml/rev	31,9	26,5	22,0	1,5	8,9	14,7
	B08	26,4 ml/rev	39,6	34,1	29,6	1,6	10,7	17,7
	B10	34,1 ml/rev	51,1	45,7	41,2	1,7	13,4	22,3
	B12	37,1 ml/rev	55,6	50,2	45,7	1,7	14,4	24,1
	B14	46,0 ml/rev	69,0	63,5	59,0	1,9	17,6	29,5
	B17	58,3 ml/rev	87,4	82,0	77,5	2,1	21,9	36,9
	B20	63,8 ml/rev	95,7	90,2	85,7	2,2	23,8	40,2
	B22	70,3 ml/rev	105,4	100,0	95,5	2,3	26,1	44,1
	B25 <sup>1)</sup>	79,3 ml/rev	118,9	113,5	109,0	2,5	29,2	49,5
B28 <sup>1)</sup>	88,8 ml/rev	133,2	127,7	124,5 <sup>2)</sup>	2,8	32,7	48,5 <sup>2)</sup>	
B31 <sup>1)</sup>	100,0 ml/rev	15,0	144,5	141,3 <sup>2)</sup>	2,8	36,5	54,4 <sup>2)</sup>	

<sup>1)</sup> B25 - B28 - B31 = 2500 R.P.M. max.      <sup>2)</sup> B28 - B31 = 210 bar max. int.  
 - Not to use because internal leakage greater than 50% theoretical flow.

Port connection can be furnished with metric threads.