

Pumps complete with motor and hydraulic power packs type RZ

Ready for installation and operation pump units with dual stage pumps acc. to D 6910

High pressure pump	Pressure $p_{\max HP}$	= 700 bar	Dual stage pumps type RZ	D 6910
	Delivery flow $Q_{\max HP}$	= 91.2 lpm (1450 rpm)		
	Geo. displacement $V_{geo HP}$	= 64.2 cm ³ /rev.		
Low pressure pump	Pressure $p_{\max LP}$	= 200 bar		
	Delivery flow $Q_{\max LP}$	= 135 lpm (1450 rpm)		
	Geo. displacement $V_{geo LP}$	= 89.6 cm ³ /rev.		
Tank volume	V_{\max}	= 470 l		


1. General

Certain sizes of the pump combinations type RZ acc. to D 6910, sect. 2.2 are available as motor pumps or turn-key power packs, dep. on their dimensions and power requirement.

The following versions are available:

- **Pump completes with motor**


for separate installation outside a tank



- **Hydraulic power packs for direct pipe connection**

The high pressure, low pressure and the return line are directly connected and routed to the separately mounted dual stage valve or switch units. Retrofitting of these valves (acc. to sect. 2.3) is not possible.

This is important when working on the lay-out of the hydraulic system.




- **Hydraulic power packs with directly mounted two stage valves type NE 20 (21, 70, 80) acc. to D 7161 or switch units type CR 4 M and CR 5 M acc. to D 7150**



For parameters of the respective valves, see the specified pamphlets. It is most important to keep in mind the permissible flow rating of the selected valves, when combining them with these pumps, see selection table.

with directly mounted switch unit
type CR 4M or CR 5M

with directly mounted two stage valve
type NE 20 or NE 21

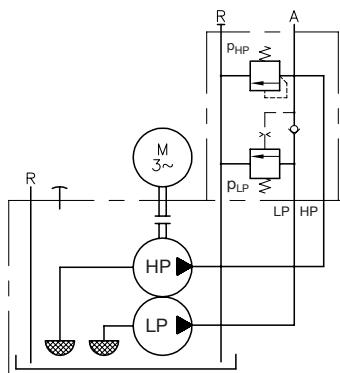

with directly mounted two stage
valve type NE 70 or NE 80

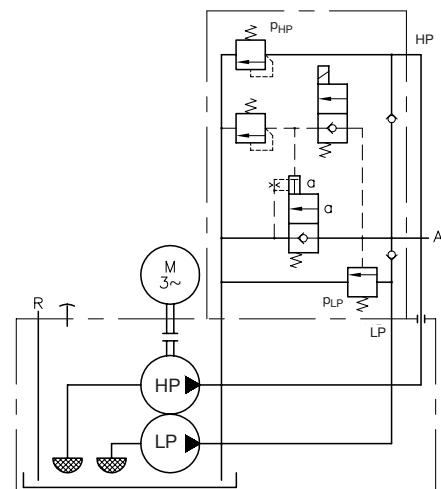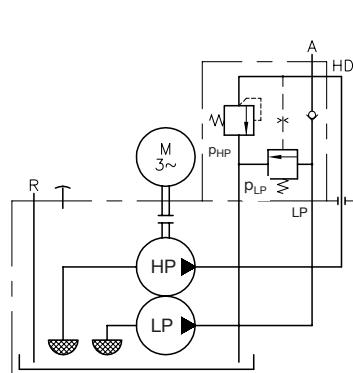

2. Available combinations

2.1 Pump completes with motor

For a listing of standard bell housings and flex-couplings, see D 6010 H sect. 6.2

Order example:


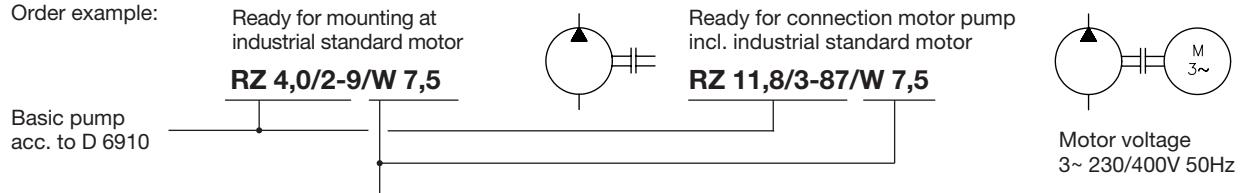


Table 1: Selection table (power)

W		Ready for mounting at industrial standard motor, design IM B 35								
M		Ready for connection motor pump incl. industrial standard motor, design IM B 35								
Standard combination	Drive power (kW) ¹⁾	0,25	0,55	1,1	2,2	5,5	11	18,5	30	
	7361	●	●	●						
	6910	●	●	●	●					
	6911		●	●	●	●				
	6912				●	●	●			
	6914					●	●	●		
	6916						●	●	●	

Unit dimensions

All dimensions in mm, subject to change without notice!

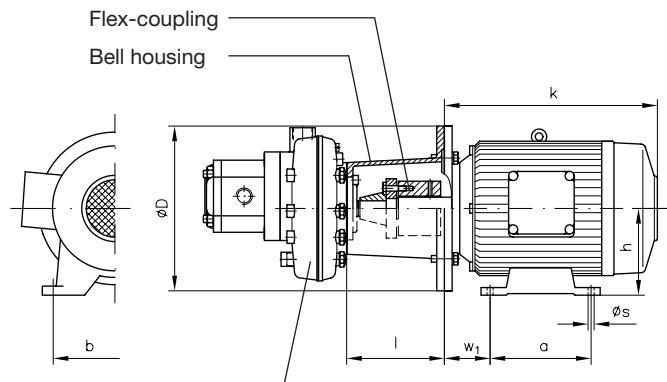

Mass (weight) approx. kg (substantial are the spec. of the manufacturer)

Power rating (kW)	Suited bell housings and flex-couplings for combination with design						Motor 3)
	7631	6910	6911	6912	6914	6916	
0.25 and 0.37	3.1	3.1					6 ... 7.3
0.55 and 0.75	3.5	3.5					9 ... 10
1.1							12 ... 14
1.5	3.5	3.5	3.8				15
2.2			3.8	3.9	4.0		20 ... 21
3							23 ... 24
4			3.8	3.9	4.0		28 ... 35
5.5				6.4	6.4	6.4	45 ... 58
7.5 and 9							60 ... 80
11							80 ... 110
15							100 ... 145
18,5							115 ... 170
22							140 ... 185
30							11.9 170 ... 240


Power rating (kW)	Ext. flange-Ø D (mm)	Bell housing length l (mm), when comb. with design						Outline dimensions of industrial standard motor 4)						3) Guideline data for two makes, but substantial are the spec. of the manufacturer!
		7631	6910	6911	6912	6914	6916	h	a	b	Øs	w1	k 4)	
0.25 and 0.37	160	83	83					71	90	112	7	45	190 ... 210	
0.55 and 0.75	200	109	109	123				80	100	125	9	50	215 ... 230	
1.1														
1.5	200	109	109	123				90	100	125	9 (10)	56	240 ... 250	265 ... 270
2.2														
3	250		113	113	123			100	140	160	12	63	280 ... 320	
4	250		113	113	123			112	140	190	12	70	315 ... 320	
5.5														
7.5 and 9	300			155	155	155		132	140	216	12	89	330 ... 360	390 ... 400
11														
15	350				188	188	209	160	210	254	14 (15)	121	500 ... 520	500 ... 550
18,5														
22	350				188	209	180	241	279	14 (15)	121	500 ... 550	550 ... 580	
30	400							212	200	305	18	133	620 ... 650	

3) Guideline data for two makes, but substantial are the spec. of the manufacturer!

4) Not standardized! Guideline data for two makes, but substantial are the spec. of the manufacturer! See also DIN 42 673-4 and DIN 42 677-4 (outline dimensions)

2.2 Hydraulic power packs for direct pipe connection

Order example:

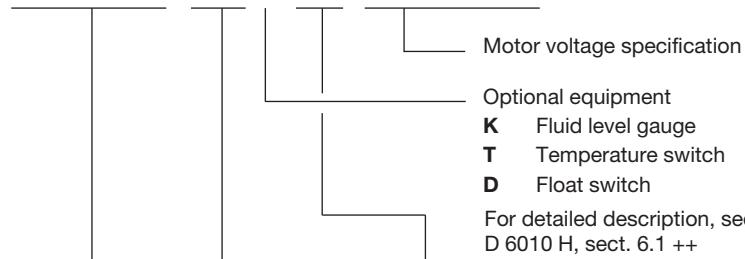RZ 8,4/2 - 28 / B 50 K - V 4 3~ 230/400V 50 Hz**Table 2:** Possible combinations

Design of HP-stage	Dual stage pump acc. to D 6910, table sect. 2.1		Tank, see table 3 ¹⁾	Motor, see table 4	Mass (weight) approx. (kg) ²⁾	
7631	RZ 0,18 ... 1,77/1 -		2,0 ... 6,9	B 13 ... B 40	V(Z) 0,55 ... 1,5	4.1
			8,8 ... 11,3	B 20 ... B 40		4.3
6910	RZ 0,3 ... 6,5/2 -		9 ... 12,3	B 20	V(Z) 0,25 ... 3	5.4
			9 ... 28	B 30 and B 40		5.9
			9 ... 37	B 50 and B 75		6.2
6911	RZ 1,4 ... 15,3/2 -		9 ... 28	B 30 and B 40	V(Z) 0,55 ... 4	8.7
			9 ... 37	B 50 ... B 160	V(Z) 0,55 ... 5,5	9
6912	RZ 2,7 ... 30,4/2 -		9 ... 28	B 50	V(Z) 2,2 ... 7,5	12.9
			9 ... 37	B 75 ... B 160	V(Z) 2,2 ... 11	13.2
6914	RZ 6,1 ... 60,8/2 -		9 ... 37	B 100 ... B 400	V(Z) 5,5 ... 22	26.6
6911	RZ 0,9 ... 15,3/3 -		45 and 59	B 50	V(Z) 0,55 ... 7,5	11.8
			75 and 87	B 75 ... B 160	V(Z) 0,55 ... 11	11.8
			75 and 87	B 100 ... B 400	V(Z) 5,5 ... 11	13.6
6912	RZ 2,7 ... 30,4/3 -		45 and 59	B 160 ... B 400	V(Z) 2,2 ... 11	16
			75 and 87	B 160 ... B 400	V(Z) 5,5 ... 11	17.8
6914	RZ 6,1 ... 60,8/3 -		45 ... 87	B 160 ... B 400	V(Z) 5,5 ... 22	31.2

Table 3: Tanks for hydraulic power packs acc. to sect. 2.2 and 2.3; For dimensional drawings, see sect. 3.2 and 3.3

Coding	B 13	B 20	B 30	B 40	B 50	B 75	B 100	B 160	B 250	B 400	
Tank volume approx. (l)	Filling volume	16	26.5	37	47	90	110	150	190	315	470
Usable filling volume		12	22	32	42	60	80	100 (90)	140 (130)	250	400
Mass (weight) approx. (kg) Tank and accessories, without fluid filling	8.5	10	12.5	14.5	30	32	52	59	102	126	

Mass (weight) of the fluid filling in kg approx. 0.9 x filling volume

Table 4: Motor design B 5 (V1) for hydraulic power packs acc. to sect. 2.2 and 2.3; For dimensional drawings, see sect. 3.1

V	Coding for utilized motor design B 5 (V1)								Nominal speed 1450 rpm (50 Hz)							
	Standard voltage 230/400V Δ Y 50 Hz $P_N = 0.25 \dots 3$ kW (265/460V 60 Hz)								400 (630)V Δ (Y) 50 Hz $P_N \geq 4$ kW (460V 60 Hz)							
Z	Prepared for customer furnished motor ⁴⁾															
	P _N (kW)	0,25	0,37	0,55	0,75	1,1	1,5	2,2	3	4	5,5	7,5	9 ³⁾	11	15	18,5
DIN-size	71	80	90 S	90 L	100 L	112 M	132 S	132 M	160 M	160 L	180 M	180 L				

1) For cover plate versions suited for customer furnished tanks, see D 6910 Z

2) Only pump combination type RZ

3) A motor with this output is not standardized, but usually is like industrial standard 132 M. Not available from all manufacturers!

4) The selected bell housing L... acc. to D 6010, sect. 6.2 has to be specified in uncoded text, when a pump/motor combination -Z.. for installation in a customer furnished tank is desired. There is a range of bell housings suited for various drive power.

2.3 Hydraulic power packs with two stage valve or built up switch unit

The hydraulic power packs listed below come with directly mounted two stage valves type NE 20 (21, 70, 80) acc. to D 7161 or switch units type CR 4 M and CR 5 M acc. to D 7150. For more detailed information about these valves, see the respective pamphlets.

Attention: Tank sizes B 13 to B 40 acc. to sect. 2.2 are not available with these directly mounted valves!

Order example:

RZ 6,0 /2 - 24 / B 50 - V 3 CR 4M - 280/30 3~ 230/400V 50 Hz

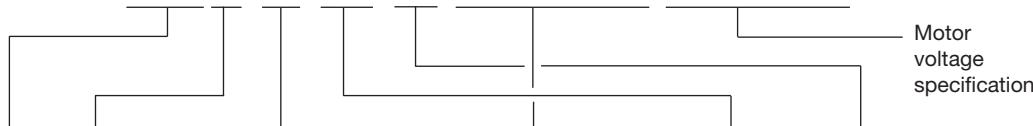


Table 5:
Possible combinations

Design	Delivery flow coding; For listing, see D 6910, sect. 2.1	Size	Low pressure stage LP					Tank size (see table 3, sect. 2.2)	Motor (see table 4 sect. 2.2)
			Flow coding with directly mounted Two stage valve		Switch unit				
NE 20	NE 21 ¹³⁾	NE 70	NE 80	CR 4M	CR 5M				
6910	RZ 0.3 ... 6.5 ¹⁾	/2 -	9 ... 37			21 ... 37		B 50 and B 75	V(Z) 0.25 ... 3
6911	RZ 1.4 ... 7.0 ²⁾		9 ... 37			21 ... 37			V(Z) 0.55 ... 5.5
	RZ 8.3 ... 11.8 ³⁾			9 ... 37		9 ... 37			V(Z) 2.2 ... 7.5 (11)
6912	RZ 2.7 ... 7.4 ⁴⁾		9 ... 37 ¹²⁾			21 ... 37			V(Z) 0.25 ... 3
	RZ 8.2 and 11.6 ⁵⁾			9 ... 37		9 ... 37			V(Z) 0.55 ... 7.5 (11)
6911	RZ 0.9 ... 6.5 ¹⁾	/3 -		45 and 59		45 and 59		B 100 and B 160	V(Z) 0.25 ... 3
	RZ 1.4 ... 11.8 ⁶⁾			45 and 59		45 and 59			V(Z) 0.55 ... 5.5
6912	RZ 2.7 ... 11.6 ⁷⁾			45 and 59		45 and 59			V(Z) 2.2 ... 11
6914	RZ 6.1 ... 11.0 ⁹⁾			45 and 59		45 and 59			V(Z) 5.5 ... 11
	RZ 15.0 ... 25.0 ¹⁰⁾			9 ... 37		9 ... 37			V(Z) 5.5 ... 22
6911	RZ 0.9 ... 11.8 ¹¹⁾	/3 -		45 and 59		45 and 59		B 250 and B 400	V(Z) 0.55 ... 11
	RZ 13.3 and 15.3			45 and 59		45 and 59			V(Z) 2.2 ... 11
6912	RZ 2.7 ... 11.6 ⁷⁾			45 and 59		45 and 59			V(Z) 0.55 ... 22
	RZ 12.0 ... 30.4 ⁸⁾			45 and 59		45 and 59			V(Z) 0.55 ... 11
6914	RZ 6.1 ... 11.0 ⁹⁾			75 and 87		75 and 87			V(Z) 2.2 ... 11
	RZ 15.0 ... 25.0 ¹⁰⁾			75 and 87		75 and 87			V(Z) 5.5 ... 22
6911	RZ 0.9 ... 11.8 ¹¹⁾			75 and 87		75 and 87			V(Z) 5.5 ... 11
	RZ 13.3 and 15.3			75 and 87		75 and 87			
6912	RZ 2.7 ... 11.6 ⁷⁾			75 and 87		75 and 87			
	RZ 12.0 ... 30.4 ⁸⁾			75 and 87		75 and 87			
6914	RZ 6.1 ... 11.0 ⁹⁾			75 and 87		75 and 87			
	RZ 15.0 ... 25.0 ¹⁰⁾			75 and 87		75 and 87			

1) 0.3 - 0.41 - 0.5 - 0.8 - 1.2 - 1.45 - 1.7 - 1.9 - 2.2
0.6 - 0.83 - 1.0 - 1.6 - 2.4 - 2.8 - 3.3 - 3.8 - 4.4
0.9 - 1.25 - 1.5 - 2.5 - 3.6 - 4.3 - 5.1 - 5.6 - 6.5

2) 1.4 - 2.08 - 2.6 - 4.2 - 6.0 - 7.0
2.1 - 2.9 - 3.7 - 5.8

3) 8.3 - 9.6 - 10.9
8.4 - 9.8 - 11.8

4) 2.7 - 4.15 - 5.3
4.0 - 5.85 - 7.4

5) 8.2 - 11.6

6) 1.4 - 2.08 - 2.6 - 4.2 - 6.0 - 7.0 - 8.3 - 9.6 - 10.9
2.1 - 2.9 - 3.7 - 5.8 - 8.4 - 9.8 - 11.8

7) 2.7 - 4.15 - 5.3 - 8.2
4.0 - 5.85 - 7.4 - 11.6

9) 6.1 - 5.35 - 11.0
8.0 - 11.65

11) 0.9 - 1.25 - 1.5 - 2.5 - 3.6 - 4.3 - 5.1 - 5.6 - 6.5
1.4 - 2.08 - 2.6 - 4.2 - 6.0 - 7.0 - 8.3 - 9.6 - 10.9
2.1 - 2.9 - 3.7 - 5.8 - 8.4 - 9.8 - 11.8 - 13.3 - 15.3

12) Pump combination RZ 2.7 ... 7.4/2-16 ... 37 /B 50 together with
NE 20 or NE 21 only available with drive power up to 4 kW (V/Z 4)

13) Directional seated valve banks type VB 11(21)G... acc. to D 7302
can be directly mounted at the two stage valve type NE 21

8) 12.0 - 14.2 - 16.8 - 19.3 - 21.7
17.0 - 20.0 - 23.5 - 26.5 - 30.4

10) 17.4 - 25.0
15.0 - 23.0


3. Unit dimensions

All dimensions in mm, subject to change without notice!

3.1 Motors

P_N (kW)	DIN-size	Main dimensions (mm) acc. to DIN 42 948				Mass (weight) approx. (kg) ³⁾
		D	d	L	approx. H ¹⁾	
0.25	71	160	14	30	210	5.5 + 1
0.37						6.8 + 2
0.55	80	200	19	40	230	8 + 2
0.75						10 + 2
1.1	90 S	200	24	50	250	12 + 2
1.5	90 L				270	14 + 2
2.2	100 L	250	28	60	320	18 + 2
3						22 + 3
4	112 M				330	28 + 3
5.5	132 S	300	38	80	360	56 + 4
7.5	132 M				400	68 + 5
9 ¹⁾ ²⁾	2)					(70) + 5
11	160 M	350	42	100	460	100 + 5
15	160 L				520	125 + 6
18.5	180 M	350	48	110	550	154 + 6
22	180 L				580	170 + 6

Motor design B 5 (V1)

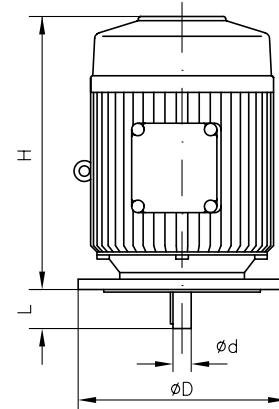

This dimension is not standardized and depends on the make.


¹⁾ Not standardized

²⁾ A motor with this output is not standardized, but usually is like industrial standard 132 M

³⁾ Motor + flex-coupling; only reference value, as the motor mass (weight) depends on the make; rounded coupling weight


3.2 Tanks for hydraulic power packs type RZ acc. to sect. 2.2

Tank size B 13 to B 40

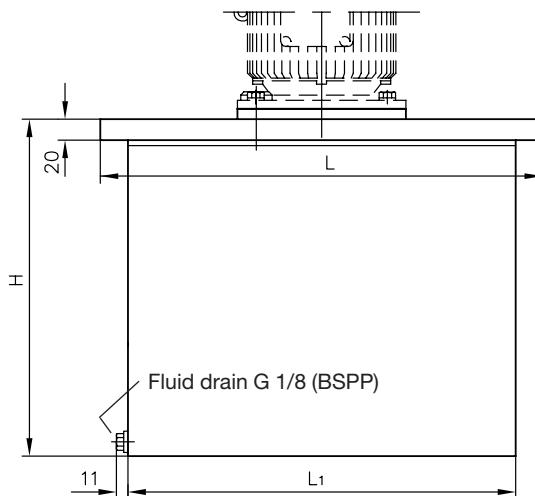


For detailed tank dimensions, see D 6010 H!

Tank size	B	B1	H	L	L1	b
B 13	260	---	244	450	370	180
B 20	260	---	334	450	370	180
B 30	320	---	334	510	450	210
B 40	320	440	334	510	450	210

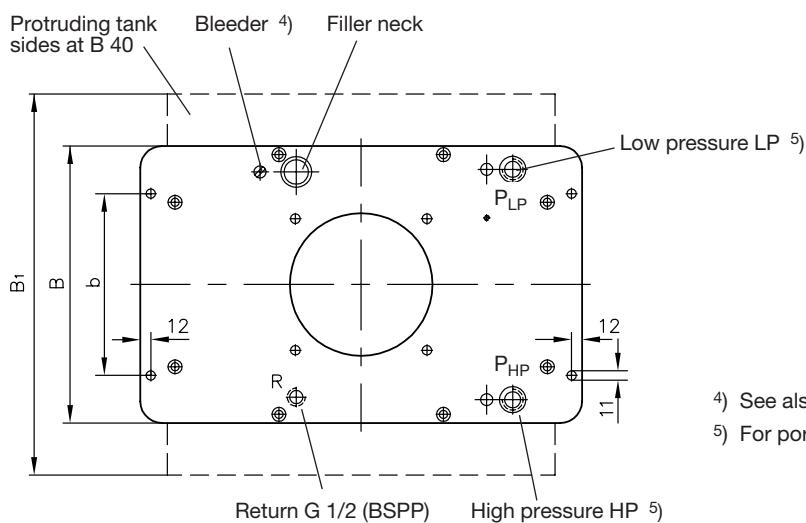

⁴⁾ See also notes in sect. 4

⁵⁾ For port size, see table 6, page 6

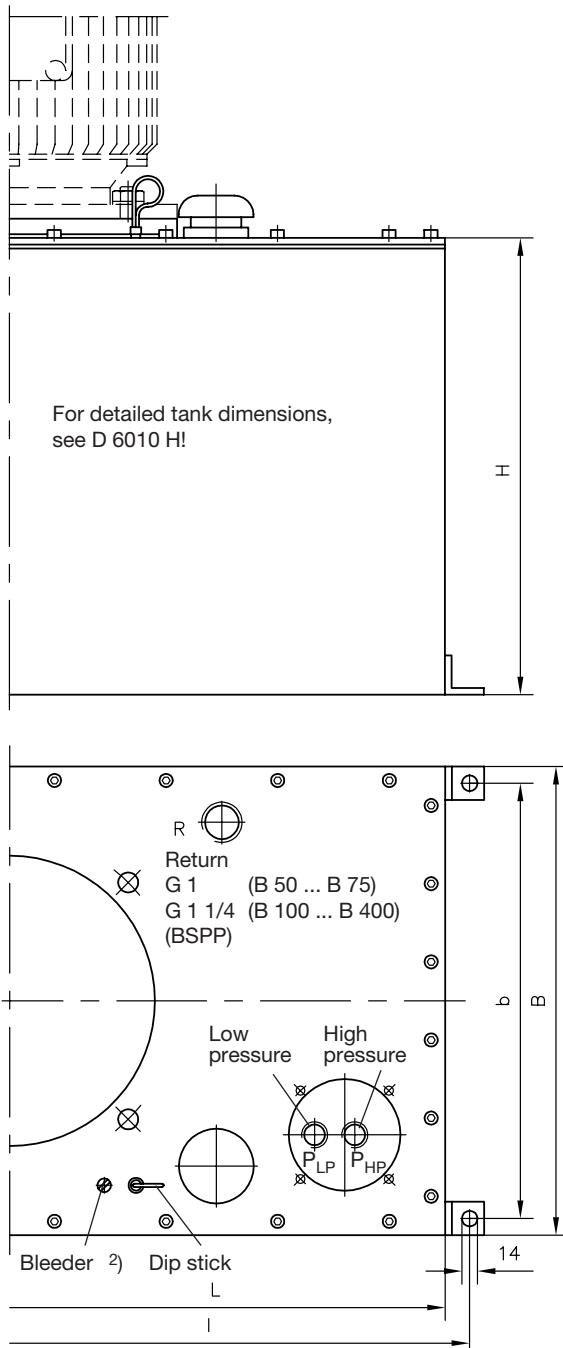Tank size B 50 to B 400

Tank size	H	B	b	L	I
B 50	405	420	390	600	630
B 75	480	420	390	600	630
B 100	536	500	470	650	680
B 160	666	500	470	650	680
B 250	575	650	620	1000	1044
B 400	825	650	620	1000	1044

Table 6:

Port size (ISO 228/1) (BSPP) of both pressure ports P_{HP} ¹⁾ and P_{LP}

Pump combination acc. to sect. 2.2	Tank size				
	B 13 B 20	B 30	B 40	B 50	B 75
RZ 0.3/2- to 9 ... 28	9 ... 12.3	G 1/2	G 1/2	G 1/2	G 1/2
RZ 6.5/2- 37	---	---	---	---	G 3/4

Pump combination acc. to sect. 2.2	Tank size				
	B 30 B 40	B 50	B 75	B 100 B 160	B 250 B 400
RZ 1.4/2- to 9 ... 28	G 1/2	G 1/2	---	---	---
RZ 15.3/2- 37	---	G 3/4	---	---	---
RZ 2.7/2- to 9 ... 28	---	G 1/2	G 3/4	---	---
RZ 30.4/2- 37	---	---	G 3/4	G 3/4	---
RZ 6.1/2- to 9 ... 37	---	---	---	---	G 3/4
RZ 60.8/2-	---	---	---	---	---

Pump combination acc. to sect. 2.2	Tank size				
	B 50	B 75	B 100 B 160	B 250	B 400
RZ 0.9/3 - 45 and 59 to RZ 15.3/3 - 45 and 59	---	G 3/4	---	G 3/4	---
RZ 2.7/3 - 45 and 59 to RZ 30.4/3 - 45 and 59	---	G 3/4	---	G 3/4	---

Pump combination acc. to sect. 2.2	Tank size				
	B 100	B 160	B 250	B 400	
RZ 6.1/3 - 45 and 59 to RZ 60.8/3 - 45 and 59	---	G 3/4	---	G 3/4	---
RZ 0.9/3 - 75 and 87 to RZ 60.8/3 - 75 and 87	---	G 1	---	G 1	---
RZ 0.9/3 - 110 and 135 to RZ 30.4/3 - 110 and 135	---	G 1	---	G 1	---

¹⁾ The port size of P_{HP} and P_{LP} are identical due to design reasons. It may be advantageous to reduce them via fittings (reducer) acc. to D 845.


²⁾ See also notes in sect. 4

3.3 Tanks for hydraulic power packs type RZ acc. to sect. 2.3


Tank B 50 to B 400 with directly mounted two stage valve/switch unit.

For tank dimensions, see sect. 3.2. For dimensions of directly mounted two stage valves type NE 20(21, 70, 80) see D 7161 for switch units type CR 4 M and CR 5 M. see D 7150.


Type B 50 ... B 160 with NE 20 (NE 21)

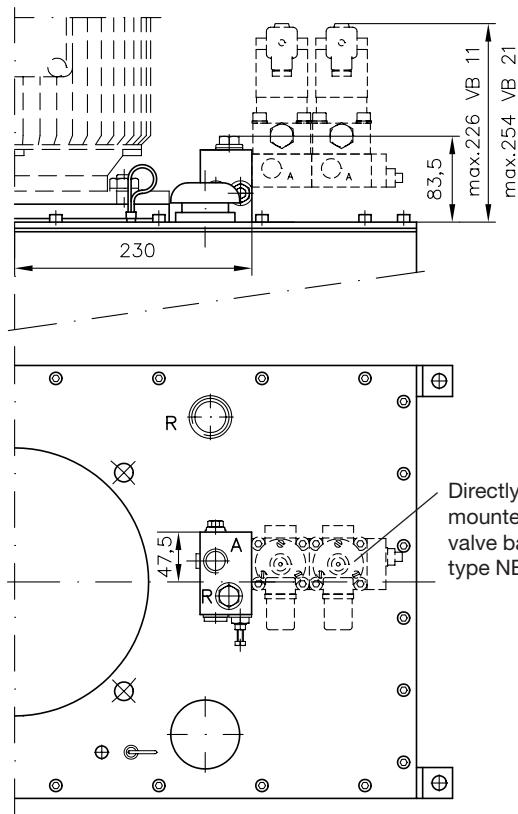

Type B 50 ... B 400 with NE 70 (NE 80)

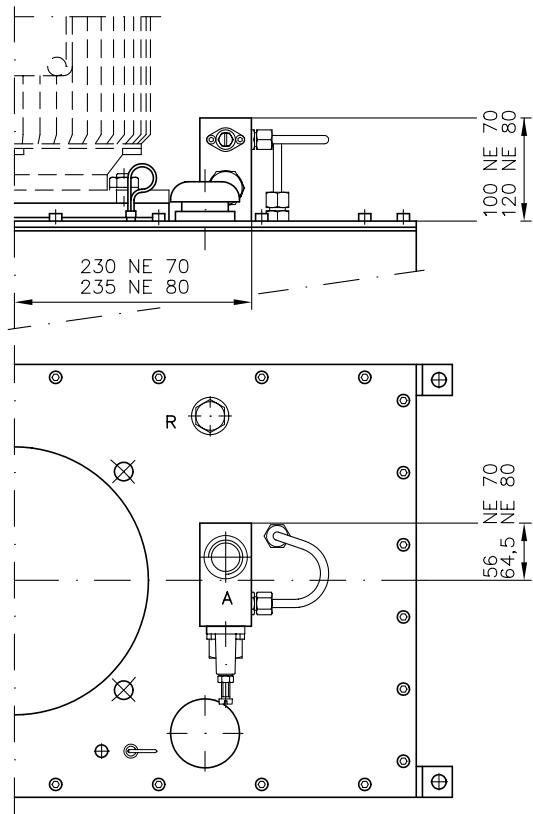

Type B 50 ... B 400 with CR 4M (CR 5M)

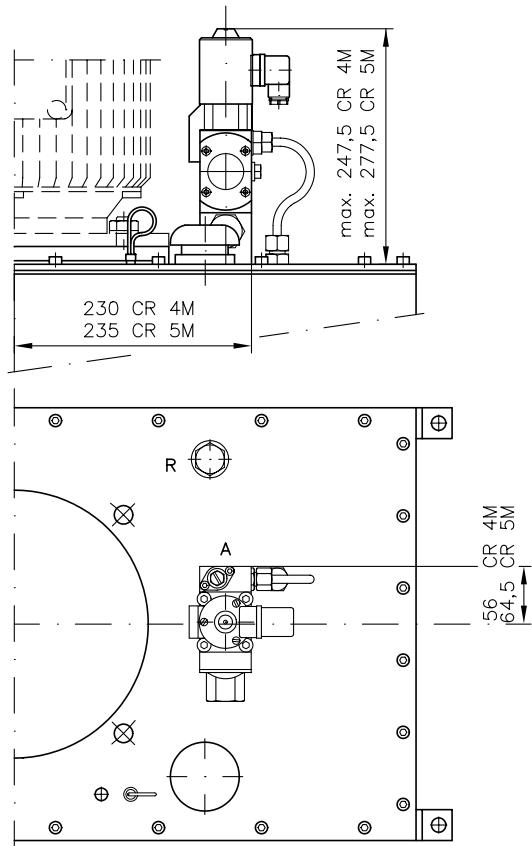


4. Notes regarding installation

4.1 Accessory acc. to D 6910 Z

When installing a pump type RZ in a customer furnished tank usually also the lines from both pumps (HP and LP) to the cover plate have to be customer furnished.

Required components:	Motor	see sect. 2.1 and 2.2
	Cover plate	see D 6910 Z
	Flex-coupling / bell-housing	see D 6010 H, sect. 6.2
	Suction line	see D 6910 Z

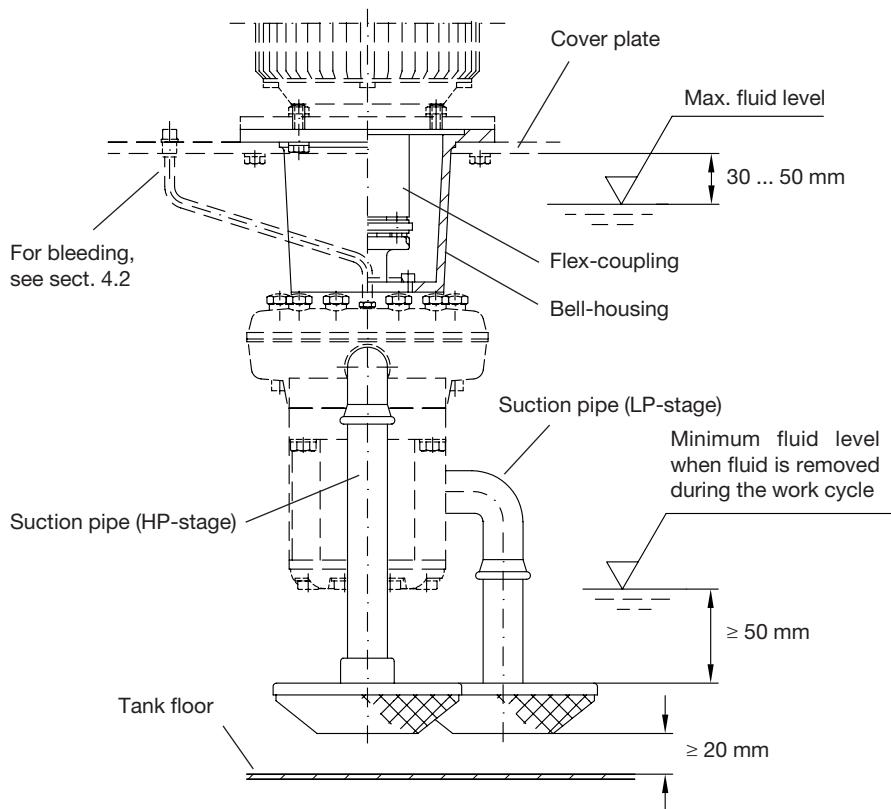

4.2 Initial operation, bleeding

Hydraulic power packs acc. to sect. 2.2 and 2.3.

Remove the bleeder screw (see dimensional drawings) prior to filling the tank, fill in the fluid, wait for 5 minutes and reinstall/tighten the bleeder screw. The tank should be well-filled during start-up but not absolutely full so as to allow the fluid to expand while reaching operation temperature. Then allow pump (HP- and LP-pressure stage) to run briefly without pressure (assuming the control system provides this possibility). Otherwise set back the pressure limiting valve to zero pressure and run the pump without pressure. Then run the hydraulic system through several cycles without load (possibly with the pressure-limiting valve set back), until all functions take place freely and smoothly in the time calculated. Finally, return the pressure-limiting valve to the setting for operation (always checked by a pressure gauge). The coupling must not get in contact with the pressure fluid.